


ICOM

IC-V10MR

MULTI-USE RADIO SERVICE (MURS) TRANSCEIVER

*Professional Grade
License-Free Radio*




- ▶ **IP67 Waterproof**
- ▶ **MIL-SPEC**
- ▶ **Large Sound for Clear Audio**
- ▶ **Built-in Motion Sensor**

**2 Years
Warranty**

Tough and Waterproof License for Professional Use

IP67 Waterproof

The IC-V10MR can be used under hard rain, and you can also wash the radio with clean water as instructed in the user manual.

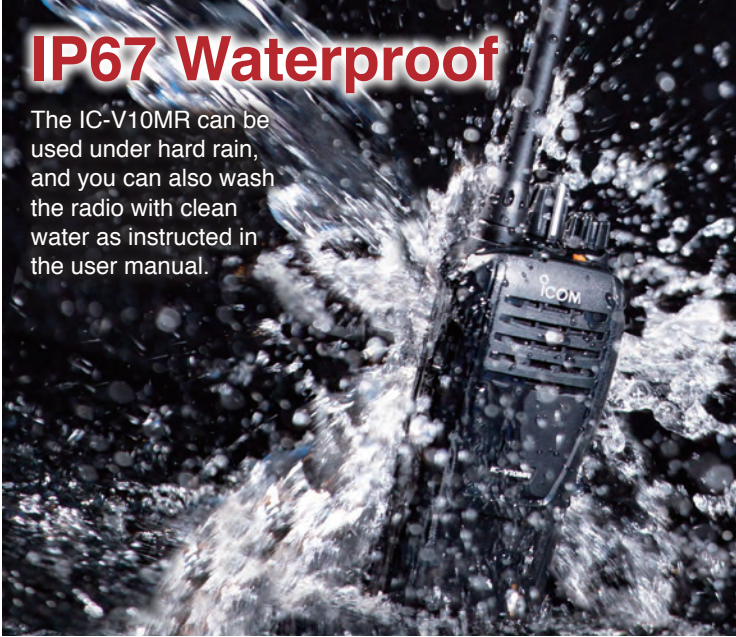

Drop Test Durability

The IC-V10MR exceeds MIL-STD specifications and has passed more difficult drop tests (1.5 m; 4.9 ft x 6 surfaces) than specified for professional use.



Large Sound for Clear Audio

The combination of a custom high capacity speaker and large sound space in front of the speaker delivers a powerful 1500 mW audio with exceptional listening clarity.



Built-in Motion Sensor

With a built-in motion sensor, the IC-V10MR's can detect its position, state of motion and non-motion and can send an emergency signal. The motion function detects if the radio is moving or shaking, for example, during a chase. The Lone Worker and Man Down functions are programmable.



Compact Size to Fit Your Palm

The radio size is a perfect fit at just 2.1 inches wide and 1.0 inches deep. And the weight is only 8.5 oz even when the battery pack is attached.



Large Capacity Battery for Long Operation

A low power consumption design and the supplied 1570 mAh Lithium-Ion battery allow use of the radio for more than 16 hours*. *5:5:90 duty ratio for transmit: receive: stand-by (with power save function)



Signaling for Selective Call

2-Tone, MDC, CTCSS and DTCS capabilities to use selective call and reject un-intended calls for quiet stand-by.

Others

- VOX function for hands-free operation
- Audio compander
- Siren sound for security alarm
- Surveillance function temporarily turns OFF the beep and LED indicator
- Emergency call with open microphone function
- Automatic scan

Free Radio



Communication Range



Up to
250,000 sq ft
in a building*



Up to
20 floors
in a building*



Up to
2 miles in
a work site*

*Communication range may differ depending on operating environment or weather conditions, etc.

SPECIFICATIONS

| | | |
|--|---|-----------------|
| Usable Frequencies and (bandwidth) | 151.820 MHz (11.25 kHz), 151.880 MHz (11.25 kHz), 151.940 MHz (11.25 kHz), 154.570 MHz (20.00 kHz), 154.600 MHz (20.00 kHz) | |
| Number of Memory channels | 16 ch | |
| Transmit output power | 2 W (High), 1 W (Mid), 0.5 W (Low) | |
| Receiver sensitivity | 0.25 μ V (typical) for 12 dB SINAD | |
| Squelch sensitivity | 0.25 μ V (typical) at squelch threshold point | |
| Audio output power (at 5% distortion, 8 Ω load) | Internal SP | 1.5 W (typical) |
| | External SP | 0.4 W (typical) |
| Antenna impedance | 50 Ω | |
| Power supply Voltage | 7.5 V | |
| Current drain | Receive stand-by | 77 mA |
| | Receive max. audio | 500 mA |
| | Transmit (High) | 0.9 A |
| Dimensions (with BP-279) | 52.2 (W) \times 111.8 (H) \times 24.5 (D) mm | |
| | 2.1 (W) \times 4.4 (H) \times 1.0 (D) inches | |
| Weight (with BP-279) | 240 g; 8.5 oz (approximate) | |

All stated specifications are subject to change without notice or obligation. Measurements made in accordance with TIA-603

Applicable U.S. Military Specifications

| Standard | MIL 810G | | |
|-------------------|----------|-----------|--|
| | Method | Procedure | Simple explanation (radio specifications are not changed after each test) |
| Low Pressure | 500.5 | I, II | Keep the transceiver 20°C/101.3 kPa and 25°C/57.2 kPa for a total of 7 hours |
| High Temperature | 501.5 | I, II | Keep the transceiver between 30 to 63°C for a total of 168 hours |
| Low Temperature | 502.5 | I, II | Keep the transceiver at -25°C for 4 hours |
| Temperature Shock | 503.5 | I - C | Keep the transceiver at -51°C/2 h and +71°C/2 h \times 3 cycles (total 12 hours) |
| Solar Radiation | 505.5 | I | Keep the transceiver at 49°C and 1120 W/m ² for 24 h \times 3 cycles (for a total of 72 hours) |
| Rain Blowing/Drip | 506.5 | I, III | I : Blast 1.7 mm/min rain with 18 m/s wind for 30 min to 6 surfaces (for a total of 180 min) III: Drip water 2800 l/m ² /h for 15 min. |
| Humidity | 507.5 | II | Keep the transceiver at 95% humidity with 30°C and 60°C for 240 hours. |
| Salt Fog | 509.5 | - | Spray 5% salt water with 1-3 ml/h at 80 cm ² under 35°C/95% condition for 24 hours then dry it under 24°C/50% condition \times 2 cycles |
| Dust Blowing | 510.5 | I | Blowing talc powder Temp/time: 23°C/6 h and 60°C/6 h, humidity: less than 30%, wind speed: 8.9 m/s, powder density: 10 \pm 7 g/m ³ |
| Immersion | 512.5 | I | Keep the transceiver in pure water for 1 m / 30 min. |
| Vibration | 514.6 | I | Vibrate the transceiver at each 3 axis (X, Y, Z), frequencies 5 - 500 Hz, 1.05 G for 1 hour |
| Shock | 516.6 | I, IV | When packing, drop 1.22 m height for 6 surfaces, 8 corners, 12 edges (total 26 drops) |

Supplied accessories

| | | | | |
|---|---|---|--|--|
| AC adapter, BC-242  | Desktop charger, BC-213  | Battery pack, BP-279  | Belt clip, MB-133  | Antenna, FA-SC28V  |
|---|---|---|--|--|



MULTI-USE RADIO SERVICE (MURS) TRANSCEIVER

IC-V10MR

OPTIONAL ACCESSORIES

SPEAKER MICROPHONES

HM-168LWP

Waterproof speaker microphone with a waterproof connector. IP67 protection

Waterproof



HM-158LA

Compact speaker microphone with 3.5 mm earphone jack



HM-159LA

Speaker microphone with 3.5 mm earphone jack



EARPHONE MICROPHONES

HM-153LA

Durable lapel microphone with earphone



HM-166LA


Light weight lapel microphone with earphone



HEADSETS (for VOX operation)

HS-94LWP

Earphone-headset with a waterproof connector



HS-95LWP

Neck-arm type headset with a waterproof connector



(Direct connection to the radio.)

HEADSETS and PTT SWITCH CABLE

HS-97

Headset with throat microphone



HS-94

Earhook type headset



HS-95

Neck-arm type headset



VS-4LA

PTT switch cable for manual PTT operation



OPC-2004LA

Plug adapter cable for VOX operation



(Either the VS-4LA or OPC-2004LA is required for use with the HS-94, HS-95 or HS-97.)

BATTERY PACK

BP-279

Li-Ion, 1570 mAh (typ.), 1485 mAh (min.) (Same as supplied)



CHARGERS

BC-213

Charges the BP-279 in 2.5 hours (approx.) (AC adapter supplied with the charger)



BC-242

AC adapter for BC-213



BC-214

Multi-charger (AC adapter supplied with the charger)



BC-157S

AC adapter for BC-214



POWER SUPPLY CABLES

CP-23L

Vehicle charger cable (For use with BC-213)



OPC-656

DC power cable (For use with BC-214)



CHARGER BRACKET AND OTHER ACCESSORIES

MB-130

Charger bracket for use with the BC-213



MB-133

Belt clip (Same as supplied)



FA-SC28V

Antenna 148-162 MHz (Same as supplied)



PROGRAMMING SOFTWARE & CABLE

CS-V10MR

Programming software for Windows® PC Available for free download from: https://www.icomjapan.com/support/firmware_driver/

OPC-478UC

Programming cable (USB)

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icomjapan.com

Count on us!

Icom America Inc.

Your local distributor/dealer:

www.icomamerica.com

12421 Willows Road NE, Kirkland, WA 98034, U.S.A.

Phone : +1 (425) 454-8155

Fax : +1 (425) 454-1509

E-mail : sales@icomamerica.com