

F3400D Series: Recording Channel Announcements

Prerequisites

- Radio Firmware v1.9 or greater
- Micro SD card and SD card reader
- USB (A - micro B type) or OPC-2338/1862 (Portables) and OPC-2363 (Mobiles)
- CS-F3400D Cloning Software


Note: Currently, the audio files are only compatible with F3400D/F5400D series radios.

Recording


1. Format the SD card as described in Section 10 of the Operating Guide.
2. Press **OK** and scroll to the **Voice Rec** function. Press **OK**.
3. Highlight **Call Recorder** and press **OK**.
4. At **Rec Start**, press **OK**.
5. A tape icon will show in the top of the Display.
6. Press and hold PTT and speak the channel name into the mic. Release PTT immediately when done speaking.
7. Repeat for all channels.

Preparing the Audio Files

1. Remove the SD card and install into your computer with a micro SD card reader.
2. Navigate to the file location as follows:

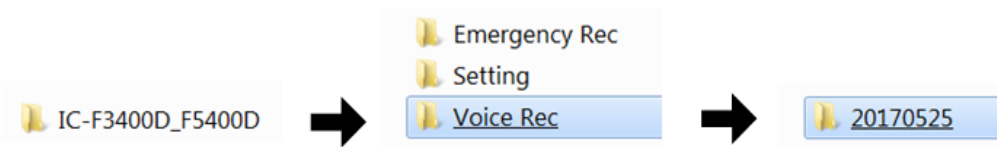

3. Copy the files and rename each one exactly as follows*:
Announce_Channel_xxx_yyy xxx= zone, e.g.001; yyy= channel, e.g. 003
4. Go to the **Setting** folder (as shown in step 2).
5. In **Setting**, create a folder and name it exactly: **Announce**.
6. Copy and paste all audio files into the **Announce** folder.

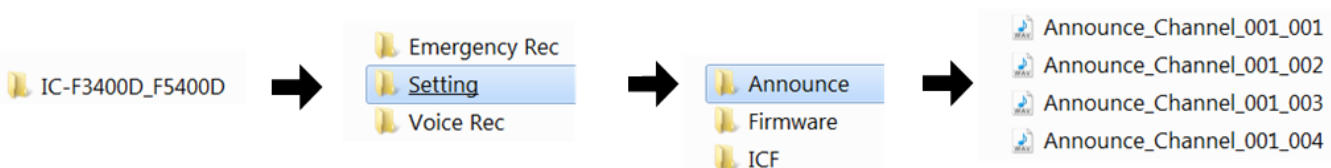

Playback

Install the SD card into the radio. Change the channels; you should hear the newly recorded audio for each channel.

* Extensions such as ".bmp" or ".wav" may be hidden by your PC as determined by the Folder Options settings. When such files are moved to your desktop, and the extensions are no longer visible, *manually* adding them in again will render the file inactive.